

LA-IR200NR

5G Industrial Router 1x1000M ETH WAN/LAN, 1x1000M ETH LAN

2 Micro-SIM slot & 2.4GHz/5.8GHz WIFI Support



Overview

LA-IR200NR is a 5G industrial CPE that uses public 3G/4G/5G networks to provide users with wireless long-distance big data transmission functions. The product uses high-performance industrial-grade 32-bit communication processors and industrial-grade wireless modules, with embedded real-time operating system as the software support platform, and provides 1 RS232 (or RS485), 1 Ethernet LAN, and 1 Ethernet WAN, 1 optical fiber interface and support WIFI function, can connect serial device, Ethernet device and WIFI device at the same time, realize data transparent transmission and routing function.

This product has been widely used in the M2M industry in the Internet of Things industry chain, such as smart grid, smart transportation supply chain automation public safety, environmental protection, meteorology, digital medical treatment remote sensing survey, military, forestry, water, coal, petrochemical and other fields.

Features

Industrial-grade Design

- High-performance industrial-grade wireless module
- High-performance industrial-grade 32-bit communication processor
- Metal shell, protection grade IP68, metal housing and system safety isolation
- Wide power input DC9-36V

Stability & Reliability

- WDT Watchdog design to ensure system stability
- Adopt a complete anti-drop mechanism to ensure that the data terminal is always online
- Built-in 1.5KV electromagnetic isolation protection for Ethernet interface
- RS232/RS485 interface power and data isolation, in line with CSA, UL and IEC standards
- SIM/UIM card interface built-in 15KV ESD protection
- Built-in reverse phase protection and over voltage protection for power interface

Standard & Convenience

- Standard RS232, RS485, Ethernet and Wi-Fi Interface
- Standard WAN port, support PPPOE protocol, which can be directly connected to ADSL equipment
- Intelligent data terminal, can enter data transmission state after power on
- Easy to use, flexible, multiple working mode options
- Convenient system configuration and maintenance interface (WEB /CLI)
- Support wall-mounted, pole-mounted installation

High Performance

- Multiple WAN connection methods, include Static IP/DHCP/PPPOE/DHCP-4G/5G
- 3G/4G/5G and wired WAN dual link backup(optional)
- VPN Tunnel: PPTP/L2TP/IPSEC/OPENVPN/GRE
- Remote management: SYSLOG, SNMP, TELNET, SSH, HTTPS
- Support firmware local upgrade and remote upgrade
- Support import and export configuration files
- NTP and Built-in RTC
- MAC address clone
- 2.4G WIFI support 802.11b/g/n,5.8G WIFI support 802.11ac
- Support WIFI AP mode, Client mode, bridge mode(optional)
- WIFI support WEP, WPA, WPA2 encryption
- Support multiple online and offline trigger modes
- Support APN/Private APN
- Support DHCP server/client, DHCP binding MAC, DDNS, NAT, DMZ, QOS, Traffic statistics, real-time display of data transmission rate
- Support TCP/IP, UDP, FTP, HTTP and other network protocols
- Support SP| firewall, access control, URL filter
- Support IPV6/IPV4

Specification

Cellular Specification	
Module	Industrial grade wireless module
Frequency	5G NR: n1/n2/n3/n5/n7/n8/n20/n28/n41/n66/n71/n77/n78/n79 LTE: B1/B2/B3/B4(66)/B5(18/19/26)/B7/B8/B12(17)/B13/B14/B20/B25/B26/B28/B29/ B30/B38/B39/B40/B41/B42/B43/B46/ B48/B71 Remarks: different modules support different network standards
Bandwidth	5G NR: DL 3.4Gbps, UL 350Mbps

	LTE Cat20: DL 2.0Gbps, UL 150Mbps HSPA+: DL 42Mbps, UL 5.76Mbps
Power	< 23dBm
Sensitivity	<-97dBm
Wi-Fi Specification	
Module	IEEE802.11b/g/n, 2.4G, AP mode, Station mode (Optional) IEEE802.11ac, 5.8G, AP mode, Station mode (Optional)
Frequency	IEEE802.11b/g: 54Mbps IEEE802.11n: 300Mbps IEEE802.11ac: 866Mbps
Security	WEP, WPA, WPA2 encryption, WPS (Optional)
Power	26dBm (11b), 21dBm (11ac/MCS7/HT40), 20dBm (11ac/MCS9/HT80)
Sensitive	<-72dBm@54Mbps
Hardware System	
CPU	Industrial-grade 32-bit communication processor
Flash	Nor flash 16MB NAND flash 128MB
DDR3	512MB
Interface	
WAN	1x1000M ETH port (RJ45 waterproof), auto adapt MDI/MDIX, built in 1.5KV ESD
LAN	1x1000M ETH port (RJ45 waterproof), auto adapt MDI/MDIX, built in 1.5KV ESD
Optical Fiber	1x1000M fiber interface (External all-plastic waterproof interface) Auto adapt MDI/MDIX, built in 1.5KV ESD
Console	1xRS232/RS485 serial port (External all-plastic waterproof interface), Built in 15KV ESD Data bit: 5, 6, 7, 8 Stop bit: 1, 1.5 (Optional), 2 Check: NONE, ODD, EVEN, SPACE (Optional) and MARK (Optional) Baud rate: 2400~115200bits/s
Indicators	"PWR", "SYS", "2.4G", "5.8G", "Online", "Signal"
Antenna	Cellular: 4 waterproof SMA female antenna, characteristic impedance 50 ohms WiFi: 4 waterproof SMA male antenna, characteristic impedance 50 ohms
SIM/UIM	Standard drawer type, 1.8V/3V SIM/UIM card, Built-in 15KV ESD protection
Power	Terminal interface, built-in power reverse protection
USB	USB2.0 (Built-in)
Reset Button	Through this button, the parameter configuration can be restored to the factory
Power Supply	
Standard	DC12V/1.5A and Support POE (802.3af) power supply

Range DC9-36V

Consumption <1.2A(12V)

Physical Properties

Shell Metal shell, IP68

Size 259x259x45mm (Does not include antenna and mounting parts)

Weight 2480g


Others

Operating Temperature -35~+75°C (-31~+167°F)

Storage Temperature -40~+85°C (-40~+185°F)

Relative Humidity 95% (No condensation)

Application

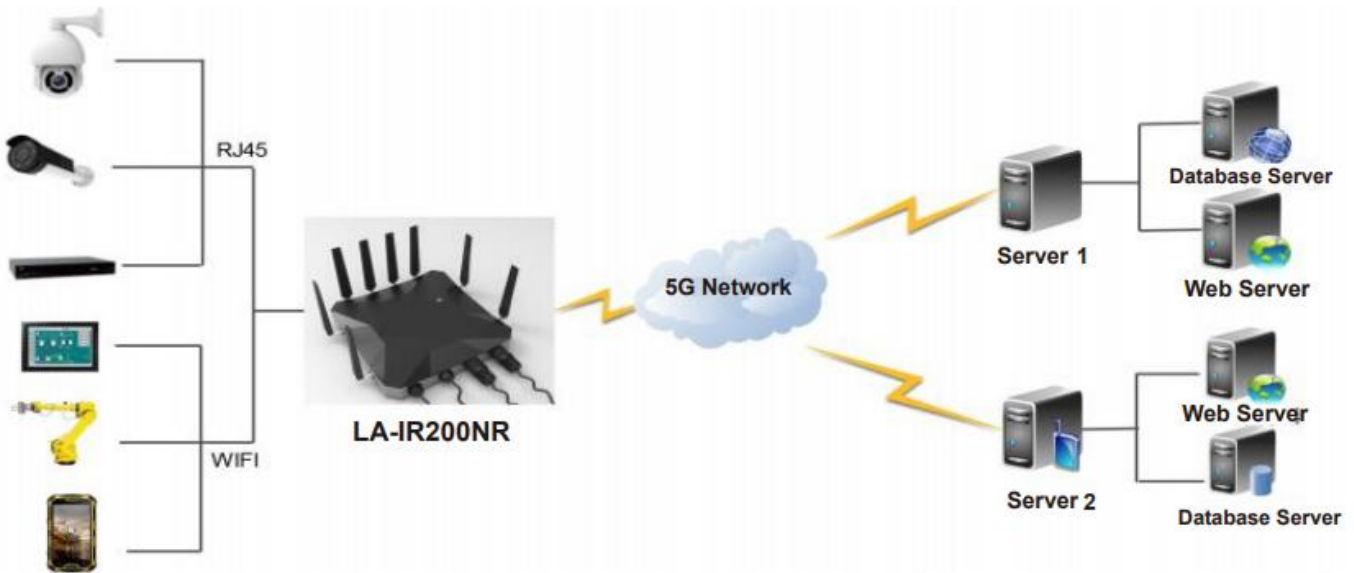

Ordering Information

PART NO	DESCRIPTION
LA-IR200NR	Cellular (5G NR) 1GE LAN, 1GE WAN, 1xRS232/RS485, 1xUSB2.0 1 SIM slot and 2.4GHz/5.8GHz WIFI support



<https://www.lanaotek.com> 

Specifications & design are subject to change without prior notice.

For more details, please email to info@lanaotek.com. Copyright©2024 lanaotek.com All Rights Reserved