

LA-IS4N-G0204P-Z

Industrial Switch 2xGigabit SFP, 4x10/100/1000Base-T PoE



Overview

LA-IS4N-G0204P-Z Industrial Ethernet Gigabit PoE Switch, is fan-less and energy-saving design, provide reliable power solution for SMBs deploying Power over Ethernet networks. It is small, convenient and easy to maintain and offers high reliability and security to guarantee the continuous industrial operation in harsh environments from $-40^{\circ}\text{C} \sim +75^{\circ}\text{C}$, such as control cabinet of transportation, factory floors, outdoors, or other low or high temperature environments.

Features

- Complies with the IEEE 802.3, IEEE 802.3u, IEEE 802.3af, IEEE 802.3at
- Auto-MDI/MDI-X detection and negotiation in half/full-duplex modes for 10/100/1000Base-TX RJ-45 port
- Features Store-and-Forward mode with wire-speed filtering and forwarding rates
- Supports packet size of up to 10K bytes
- Robust IP40 protection, fan-less design, high/low temperature resistance $-40^{\circ}\text{C} \sim +75^{\circ}\text{C}$
- DC48V-58V input
- CSMA/CD protocol
- Automatic source address learning and aging

Specifications

Provider Mode Ports

Fixed Port 2*1000 Base-X, 4*10/100/1000 Base-T

Power Interface Phoenix terminal, Dual power input

LED Indicators PWR, Link/ACT LED

DIP (Non-PoE)

1 QoS

2 Storm suppression

3 Port isolation

4 flow control

DIP (PoE)

1 Remote PD Reset

2 250m Extension

3 Port Isolation

4 Flow Control

Cable Type & Transmission Distance

Twisted-pair 0-100m (CAT5e, CAT6)

Mono-mode Optical Fiber 20/40/60/80/100KM

Multi-mode Optical Fiber 550m

Network Topology

Ring Topology Not support

Star Topology Support

Bus Topology Support

Tree Topology Support

Hybrid Topology Support

Electrical Specifications

input voltage DC12-58V; PoE DC 48-58V


Total Power consumption <5W(non-PoE), <125W(PoE)

PoE Support

PoE Port 1-4

PoE Standard	802.3af, 802.3at
Pin Assignment	1,2+, 3,6-
Layer 2 Switching	
Switching Capacity	12Gbps
Packet Forwarding Rate	8.92Mpps
MAC Address Table	2K
Buffer	1M
Forwarding Delay	<5us
MDX/MIDX	Support
Jumbo Frame	Support 9K bytes
Environment	
Operating Temperature	-40°C~+75°C
Storage Temperature	-40°C~+75°C
Relative Humidity	10%~90% (non-condensing)
Thermal Methods	Faceless design, natural heat dissipation
MTBF	100,000 hours
Mechanical Dimensions	
Product Size	143*104*46mm
Installation Method	Din-Rail
Net Weight	0.58KGs
EMC & Ingress Protection	
IP Level	IP40
Surge Protection of Power	IEC 61000-4-5 Level 3 (4KV/2KV) (8/20us)
Surge Protection of Ethernet Port	IEC 61000-4-5 Level 3 (4KV/2KV) (10/700us)
ESD	IEC 61000-4-2 Level 4 (8K/15K)
Certification	
Certificates	CE, FCC, RoHS


Dimensions

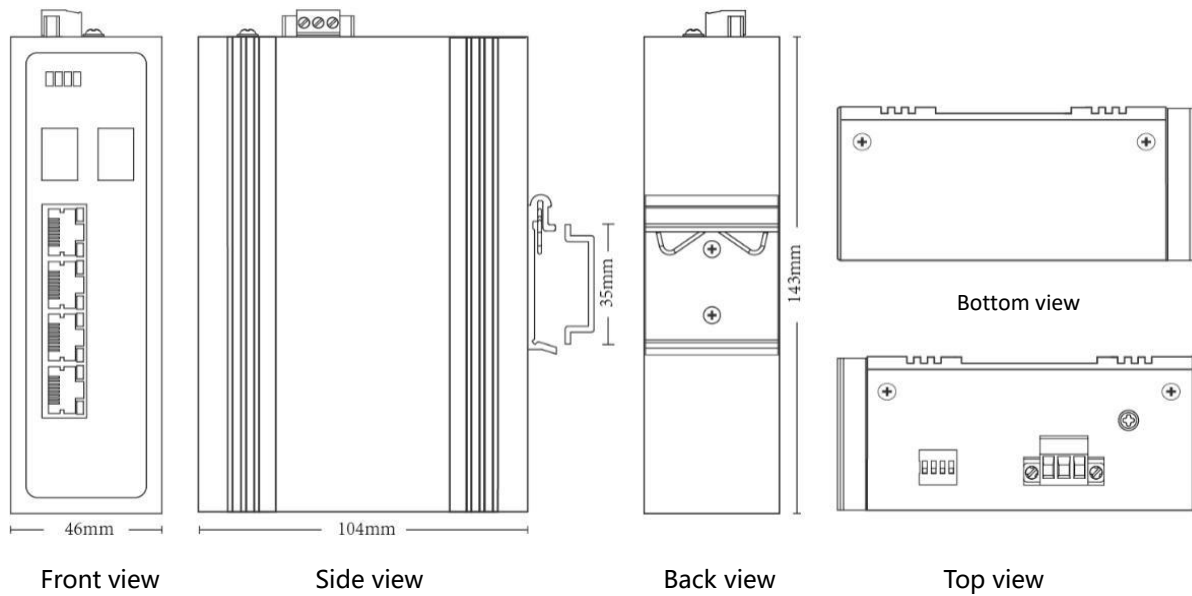

Ordering Information

P/N	Description
LA-IS4N-G0204P-Z	Unmanaged Industrial Gigabit PoE Switch 2x1000Mbps SFP, 4x10/100/1000M RJ45 PoE
LA-IS4N-G0204-Z	Unmanaged Industrial Gigabit Switch 2x1000Mbps SFP, 4x10/100/1000M RJ45



<https://www.lanaotek.com> 

Specifications & design are subject to change without prior notice.
For more details, please email to info@lanaotek.com. Copyright©2021 lanaotek.com All Rights Reserved