

# LA-IS7M2-G0424

4\*1000Base-X, 24\*10/100/1000Base-T Managed Industrial Ethernet Switch (PoE Optional)

## Highlight Information ▶▶▶▶

LA-XXX/LAM-XXX Series

For LA-XXX Series

For LA-XXX Series

## Introduction

This device is equipped with 4 1000Base-X & 24 10/100/1000Base-T Ethernet port-managed industrial Ethernet fast switch. It is designed with fanless cooling circuit design, wide operating temperature range and high protection level. Excellent industrial grade quality such as high/low temperature and lightning protection; and integrated protocols such as exchange and security, and support for public Ethernet multi-ring protection technology (ERPS), which greatly enhances network flexibility and enhances industry. Network reliability and security.

It can better meet the deployment requirements of rail transit, safe city, intelligent transportation, outdoor monitoring and other harsh environments.

## Features

- **Input Voltage:** DC12~58V
- **Shell:** IP40 protection, fanless design
- **Anti-static:** 8KV-15KV
- **Operating Temperature:** -40°C ~ +75°C
- **Test Report:** CCC, RoHS, FC, CE, ISO
- **MTBF:** 100000 Hours


## Specification

PART NO	LA-IS7M2-G0424
Provider Mode Ports	
Fixed Port	4*1000 Base-X, 24*10/100/1000 Base-T
Management Port	Support console
Power Interface	Phoenix terminal, redundant dual
LED Indicators	PWR, Link/ACT LED
Cable Type & Transmission Distance	
Twisted-pair	0-100m (CAT5e,CAT6)
Monomode Optical Fiber	20/40/60/80/100KM
Multimode Optical Fiber	550m
Network Topology	
Ring Topology	Support
Star Topology	Support
Bus Topology	Support
Tree Topology	Support
Hybrid Topology	Support
Electrical Specifications	
Input Voltage	DC12-58V
Total Power Consumption	PoE <26W
Layer 2 Switching	
Switching Capacity	68G
Packet Forwarding Rate	50.59Mpps
MAC Address Table	16K
VLAN	Support 4K
Buffer	12M
Forwarding Delay	<10us
MDX/MIDX	Support
Flow Control	Support
Jumbo Frame	10Kbytes
Spanning Tree	Support STP/RSTP/MSTP
Ring Protocol	Support ERPS
Link Aggregation	Support 12 group
Multicast	Support IGMP Snooping
Port Mirroring	Support
Storm Control	Support
Interface Counters	Support

QINQ	Support
802.1X	Support
Radius/Mac Certification	Support
Port Isolation	Support
Rmon	Support
NTP Client	Support
DHCP Client	Support
DHCP Snooping	Support
Ping/Tracert Detection	Support
Dying Gasp	Support
Optical Module DDM	Support
Convergence	
ACL	Support ACL 500 Support IP standard ACL Support MAC expand ACL Support IP expand ACL
QOS	Support QoS re-marking, priority mapping Support SP, WRR queue scheduling Support egress rate-limited, egress rate-limit Support Policy-based QoS
Management	
CLI	Support
Console	Support
Telnet	Support
WEB Management	Support
SNMP	Support SNMPv1/v2c/v3
User Management	Support
System Log	Support
Configuration File Download/Upload	Support
Upgrade Firmware	Support
Environment	
Operating Temperature	-40℃~+75℃
Storage Temperature	-40℃~+85℃
Relative Humidity	5%~95% (non-condensing)
Thermal Methods	Fanless, natural cooling
MTBF	100,000 hours
Mechanical Dimensions	
Product Size	108*104*143mm (W×H×D)
Installation Method	DIN-rail
Weight	1.3KG around

EMC & Ingress Protection	
IP Level	IP40
Surge Protection of Power	IEC 61000-4-5 Level 3 (4KV/2KV) (8/20us)
Surge Protection of Ethernet Port	IEC 61000-4-5 Level 3 (4KV/2KV) (10/700us)
RS	IEC 61000-4-3 Level 3 (10V/m)
EFI	IEC 61000-4-4 Level 3 (1V/2V)
CS	IEC 61000-4-6 Level 3 (10V/m)
PFMF	IEC 61000-4-8 Level4 (30A/m)
DIP	IEC 61000-4-11 Level3 (10V)
ESD	IEC 61000-4-2 Level 4 (8K/15K)
Free Fall	0.5m
Authentication	
Authentication	CCC/CE/FCC/RoHS

## ■ Dimensions

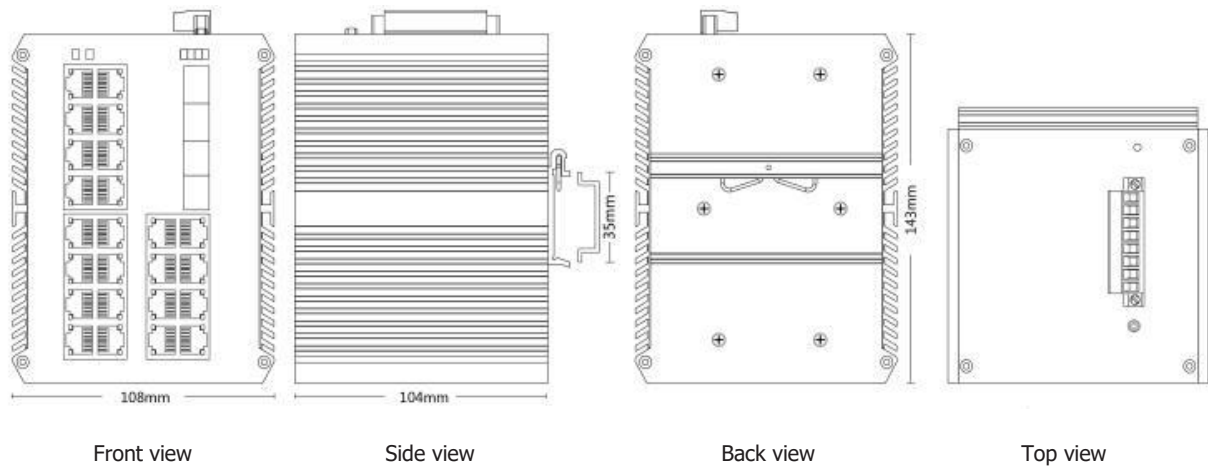

## ■ Ordering Information

PART NO	DESCRIPTION
LA-IS7M2-G0424	4*1000Mbps SFP Port, 24*10/100/1000M RJ45 Port (PoE is optional)

## ■ Accessories

PART NO	DESCRIPTION
LA-IS7M2-G0424	device, terminals, specification, certificate adapter(optional)