

LA-MC1N-G0101Micro

Micro Gigabit SFP Media Converter
with AC to USB Adaptor and DC to USB Power Cord




Introduction

LA-MC1N-G0101Micro 10/100/1000Mbps adaptive Gigabit Ethernet media converter adopts switching technology to fulfill media conversion. It complies with IEEE802.3, IEEE802.3u, IEEE802.3z and IEEE802.3ab standards.

Presently it supports two types of media network connections: 10Base-T/100Base-TX/1000Base-T, and 100/1000Base-X, inter-converting electrical signals of 10Base-T/100Base-TX/1000Base-T twisted pairs with optical signals of 100/1000Base-SX/LX. It extends the transmission distance of network from 100m via copper cable to 120km Max via fiber optical cables. It supports transmission in multi-mode dual fiber, single mode dual fiber and single mode single fiber.

When plugged into a computer's USB port, the media converter shuts down automatically when you turn off the computer, which saves energy. Micro Mini Media Converters are excellent solutions for fiber-to-the-laptop applications where you need Gigabit fiber connectivity but local power isn't available.

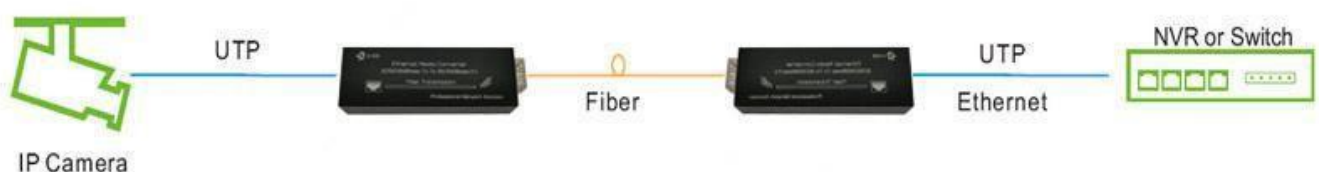

■ Features

- Smallest media converters available; tuck the unobtrusively behind a PC
- 10/100 /1000Base-T to 100/1000Base-X SFP
- SFP port support 100Base-FX or 1000Base-X dual mode (auto detection)
- USB-powered for portability, or use 5~15VDC
- wide range power input
- Ultra-compact and weigh less than 2 ounces
- Support 9k jumbo frame
- Options in single mode dual fiber, multi-mode dual fiber, and single mode in single fiber
- Aluminum Case: Conducive to heat dissipation; Lower weight and lower freight cost
- Including a Power Supply

■ Specification

P/N	LA-MC1N-G0101Micro
Access mode	10/100/1000Mbps Gigabit Ethernet
Standard	IEEE802.3 10Base-T Ethernet, IEEE802.3u 100Base-TX/FX Fast Ethernet, IEEE802.3ab 1000Base-T, IEEE802.3z 1000Base-SX/LX Gigabit Ethernet
Fiber Port	SFP - 100/1000M adaptive
Wavelength	850nm/1310nm/1550nm (Based on SFP Module used)
Transmission distance	Fiber Cable: Depends on SFP Module Category-5 twisted pairs: 100m
Port	One RJ45 port: for connecting with STP/UTP cat5/6 twisted pairs One Optical port: SFP
Conversion means	Media conversion
LFP	Not Support
BER	<10 ⁻⁹
MTBF	100,000 hours
LED indicator	PWR (Power supply) TX (LINK100/1000, TP cable rate 100/1000M) FX/ACT (Optical link action /TP cable packet forwarding action)
Power supply	DC 5~15V (Type-C)
Power consumption	<3W
Operating temperature	0~45°C
Operating humidity	5%~90%
Maintaining temperature	-40~70°C
Maintaining humidity	5% ~ 90% non-condensing
Weight	46g
Dimensions (W x D x H)	78 x 27 x 18 mm

Dimension



Ordering Information

Model	Description
LA-MC1N-G0101Micro	Ultra-compact 10/100/1000Base-T to 1000Base-X media converter, 1*Gigabit SFP port + 1*10/100/1000M RJ45 port, without SFP module, DC 5V power supply