












Indoor 5G CPE Series

-  IPv4/IPv6
-  Firewall
-  Wi-Fi 6
-  QoS
-  Voice
-  SMS
-  OpenWRT
-  Remote Management



Specification


Model	Standard	Wi-Fi	Button	Interface	Indicator	Power	Dimension	Operating Environment
 LA-ICPE-G0103 5G CPE Std	3GPP Release 15/16 5G NR & LTE Cat 16	2.4G IEEE802.11 b/g/n/ax 2x2 5G IEEE802.11 a/n/ac/ax 2x2/4x4 Support Mesh Optional* Data Rate: AX3000/AX5400	WPS/Mesh Reset Power	USB 2.0 1xGE WAN/LAN 3xGE LAN 1xSIM Slot(4FF) Optional* 1xFXS Phone 1xSIM 2xTS9 External Antennas BLE/Zigbee	5G NR 4G LTE 5G Wi-Fi 2.4G Wi-Fi Phone/Internet Power/SYS Ethernet	<24W	113.8x95.4x186mm	Work Temperature: -10°C ~ 45°C Storage Temperature: -40°C ~ +70°C Humidity: 5% ~ 95% Atmospheric Pressure: 86kPa ~ 106kPa
 LA-ICPE-G0211 5G CPE Lite	3GPP Release 15/16 5G NR & LTE Cat 16	2.4G IEEE802.11 b/g/n/ax 2x2 5G IEEE802.11 a/n/ac/ax 2x2 Data Rate: AX1500/AX1800 Support Mesh	WPS/Mesh Reset Power	USB 2.0 1xGE WAN/LAN 1xGE LAN 1xSIM Slot(4FF) Optional* 1xSIM	5G NR 4G LTE 5G Wi-Fi 2.4G Wi-Fi Internet Power Ethernet	<15W	200x135x36mm	Work Temperature: -10°C ~ 45°C Storage Temperature: -40°C ~ +70°C Humidity: 5% ~ 95% Atmospheric Pressure: 86kPa ~ 106kPa
 LA-IMF-UCS 5G MIFI	3GPP Release 16 5G NR & LTE Cat 16	2.4G IEEE802.11 b/g/n 2x2 5G IEEE802.11 a/n/ac/ax 2x2 Data Rate: AX3600 (700Mbps+2.9Gbps)	Reset Power	USB 3.0 Type-C 1xSIM Slot(4FF)	NA	<18W	150x72x12mm	Work Temperature: -10°C ~ 45°C Storage Temperature: -40°C ~ +70°C Humidity: 5% ~ 95% Atmospheric Pressure: 86kPa ~ 106kPa

Outdoor 5G CPE Series




-  IPv4/IPv6
-  Firewall & VPN
-  Wi-Fi 6
-  IP67
-  Salt Spray Resistance
-  Remote Management

Specification

Model	Standard	Wi-Fi	Interface	Indicator	Power	Dimension	Operating Environment
 LA-OCPE-G111P	3GPP Release 15/16	2.4G IEEE802.11 b/g/n/ax 2x2 5G IEEE802.11 a/n/ac/ax 2x2 Data Rate: AX3000 Internal Antenna	1xGE LAN(PoE) 1xGE LAN	Power 5G NR LTE Wi-Fi Ethernet	<24W	274x219x66.9mm	Ingress Protection Rating: IP67 Work Temperature: -30°C ~ 65°C

5G NR Antenna: Internal, Omni-directional Antenna

Application Scenario

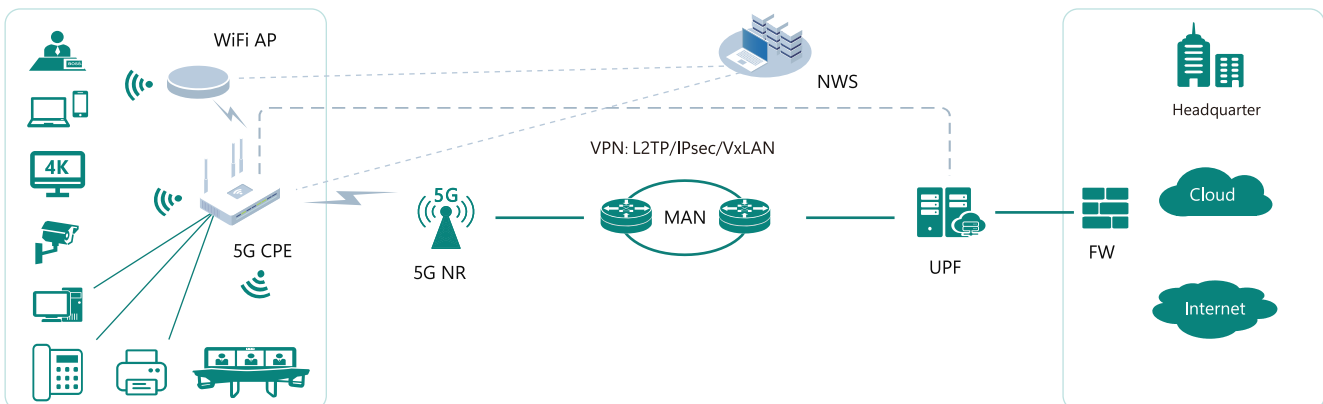

Rapid Deployment
Plug-and-Play, not Limited by Network Wired Resources.

High Performance
5G NR WAN can automatically Switch 3G/4G/5G, Device is Online all the time.

Secure APN
Support ISP Network APN, Two-Way Authentication.

VPN
End-to-End VPN, Support L2/L3 Network