












# Wi-Fi 6 AP/Router

-  IPv4/IPv6
-  Firewall
-  Wi-Fi 6+
-  OpenWRT
-  QoS
-  Remote Management

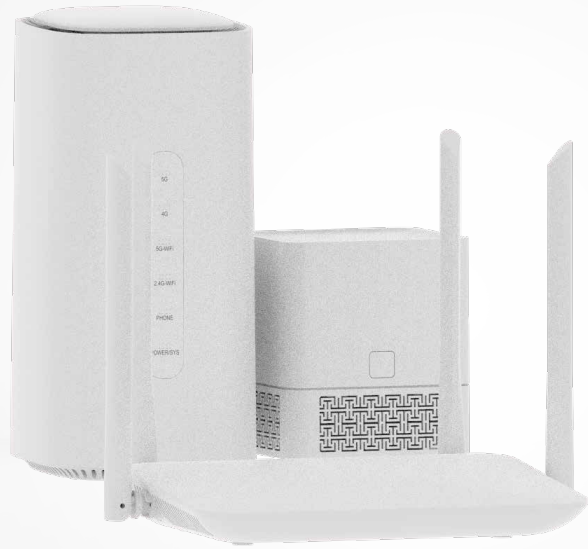




## Specification

Model	Data Rate	Wi-Fi	Interface	Indicator	Dimension	Operating Environment
 LA-W6R-G4L1	AX1500 Optional* AX1800	2.4G IEEE802.11 b/g/n 2x2 5G IEEE802.11 a/n/ac/ax 2x2	1xGE WAN/LAN 3xGE LAN	5G Wi-Fi 2.4G Wi-Fi Network Ethernet Power WPS/Mesh	190x130x29mm	Work temperature: -10°C~45°C Storage temperature: -40°C~+70°C Humidity: 5%~95% Atmospheric pressure: 86kPa~106kPa
 LA-W6R-G4L3	AX3000	2.4G IEEE802.11 b/g/n/ax 2x2 5G IEEE802.11 a/n/ac/ax 2x2	1xGE WAN/LAN 3xGE LAN	WPS Power WLAN WAN LAN	200x135x36mm	Work temperature: -10°C~45°C Storage temperature: -40°C~+70°C Humidity: 5%~95% Atmospheric pressure: 86kPa~106kPa
 LA-W6R-2.5G0104	AX5400	2.4G IEEE802.11 b/g/n 2x2 5G IEEE802.11 a/n/ac/ax 2x2	1x2.5GE WAN/LAN 4xGE LAN 1xUSB2.0	5G Wi-Fi 2.4G Wi-Fi Network Power System WPS/Mesh Ethernet	200x135x36mm	Work temperature: -10°C~45°C Storage temperature: -40°C~+70°C Humidity: 5%~95% Atmospheric pressure: 86kPa~106kPa
 LA-W6R-2.5G0104L1U6	AX3600	2.4G IEEE802.11 b/g/n/ax 4x4 5G IEEE802.11 a/n/ac/ax 4x4	1x2.5GE WAN/LAN 4xGE LAN 1xUSB 3.0	5G Wi-Fi 2.4G Wi-Fi Power Ethernet	124x104x213mm	Work temperature: -10°C~45°C Storage temperature: -40°C~+70°C Humidity: 5%~95% Atmospheric pressure: 86kPa~106kPa

# Wi-Fi 6 Ceiling AP



## Specification

Model	Type	Wi-Fi	Interface	Button	Indicator	Dimension	Operating Environment
 LA-WA-G11P	Wall Plate AP	1xGE WAN(PoE) 1xGE LAN	2.4G IEEE802.11 b/g/n/ax 2x2 5G IEEE802.11 a/n/ac/ax 2x2 Data Rate: AX3000	1xReset	1xSystem Indicator	86x86mm	Work Temperature: -10°C ~ 45°C Humidity: 5% ~ 95% Atmospheric Pressure: 86kPa ~ 106kPa
 LA-WA-G5LP	Wall Plate AP	1xGE WAN(PoE) 4xGE LAN Optional* 1xPON 1xSFP	2.4G IEEE802.11 b/g/n/ax 2x2 5G IEEE802.11 a/n/ac/ax 2x2 Data Rate: AX3000	1xReset	1xSystem Indicator	140x86mm	Work Temperature: -10°C ~ 45°C Humidity: 5% ~ 95% Atmospheric Pressure: 86kPa ~ 106kPa
 LA-WA-G1PC	Ceiling AP	1xGE WAN(PoE) Optional* 1-2xGE LAN 1xBLE 1xUSB	2.4G IEEE802.11 b/g/n/ax 2x2 5G IEEE802.11 a/n/ac/ax 2x2 Data Rate: AX3000	1xReset	1xSystem Indicator	234.7x180x49mm	Work Temperature: -10°C ~ 45°C Humidity: 5% ~ 95% Atmospheric Pressure: 86kPa ~ 106kPa
 LA-W6A-2.5G0101P	Ceiling AP	1x2.5GE WAN(PoE) Optional* 1-2xGE LAN 1xBLE 1xUSB	2.4G IEEE802.11 b/g/n/ax 2x2 5G IEEE802.11 a/n/ac/ax 4x4 Data Rate: AX5400 Optional* Tri-band	1xReset	1xSystem Indicator	234.7x180x49mm	Work Temperature: -10°C ~ 45°C Humidity: 5% ~ 95% Atmospheric Pressure: 86kPa ~ 106kPa