

LA-IS4N-F0104-M

1*100Base-X, 4*10/100Base-T Unmanaged Industrial Switch (PoE Optional)

Highlight Information ▶▶▶▶

LA-XXX/LAM-XXX Series

For LA-XXX Series

For LA-XXX Series



Introduction

This device 1*100Base-X, 4*10/100Base-T Industrial Ethernet Switch, PoE is optional. Through the fanless heat dissipation circuit design, wide range of working environment temperature, high protection level and other technologies, it provides excellent industrial quality with high/low temperature resistance and lightning protection, and enhances the reliability and safety of industrial networks.

The device can be widely applied to various broadband data transmission fields such as intelligent transportation, telecommunications, security, financial securities, customs, shipping, power, water conservancy and oil fields.

Features

- **Input Voltage:** DC12~58V
- **Shell:** IP40 protection, fanless design
- **Anti-static:** 8KV-15KV


- **Operating Temperature:** -40°C ~ +75°C
- **Test Report:** CCC, RoHS, FCC, CE
- **MTBF:** 100000 Hours

Specification

PART NO	LA-IS4N-F0104-M
Provider Mode Ports	
Fixed Port	1*100Base-X, 4*10/100Base-T
Power Interface	Phoenix terminal, dual power supply
LED Indicators	P1/P2, OPT
DIP Switch	
1 LFP	Remote PD Reset
2 LGY	LEGACY (Standard & Non-standard PoE)
3 VLAN	Port Isolation
4 BSR	Storm Control Configuration
Cable Type & Transmission Distance	
Twisted-pair	0-100m (CAT5e,CAT6)
Monomode Optical Fiber	20/40/60/80/100KM
Multimode Optical Fiber	550m
Network Topology	
Ring Topology	Unsupported
Star Topology	Support
Bus Topology	Support
Tree Topology	Support
Electrical Specifications	
Input Voltage	DC12-58V
Total Power Consumption	<5W
Layer 2 Switching	
Switching Capacity	1G
Packet Forwarding Rate	0.744Mpps
MAC Address Table	2K
Buffer	768K
Forwarding Delay	<5us
MDX/MIDX	Support
Flow Control	Support
Jumbo Frame	2K bytes
Storm Control	Support
Port Isolation	Support
Remote PD Reset	Unsupported
Environment	
Operating Temperature	-40℃~+75℃

Storage Temperature	-40℃~+75℃
Relative Humidity	10%~90% (non-condensing)
Thermal Methods	Fanless, natural cooling
MTBF	100,000 hours
Mechanical Dimensions	
Product Size	91*118*31mm (W×H×D)
Installation Method	DIN-rail
Weight	0.36KG around
EMC & Ingress Protection	
IP Level	IP40
Surge Protection of Power	IEC 61000-4-5 Level 3 (4KV/2KV) (8/20us)
Surge Protection of Ethernet Port	IEC 61000-4-5 Level 3 (4KV/2KV) (10/700us)
RS	IEC 61000-4-3 Level 3 (10V/m)
EFI	IEC 61000-4-4 Level 3 (1V/2V)
CS	IEC 61000-4-6 Level 3 (10V/m)
PFMF	IEC 61000-4-8 Level 4 (30A/m)
DIP	IEC 61000-4-11 Level 3 (10V)
EMI	CLASS A
ESD	IEC 61000-4-2 Level 4 (8K/15K)
Free Fall	0.5m
Authentication	
Authentication	CCC/CE/FCC/RoHS

■ Dimensions

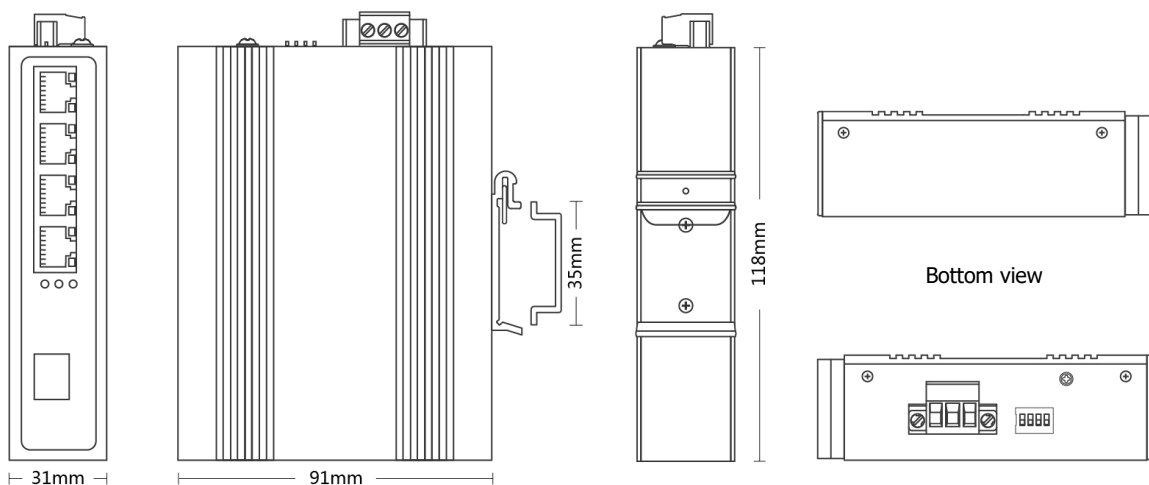

Front view
view

Side view

Back view

Top

■ Ordering Information

PART NO	DESCRIPTION
LA-IS4N-F0104-M	1*100Base-X SFP fiber port, 4*10/100M RJ45 Port, PoE support 802.3af & at
LA-IS4N-F0104-SC-M	1*100Base-X SC fiber port, 4*10/100M RJ45 Port, PoE support 802.3af & at
LA-IS4N-F0104-FC-M	1*100Base-X FC fiber port, 4*10/100M RJ45 Port, PoE support 802.3af & at
LA-IS4N-F0104-ST-M	1*100Base-X ST fiber port, 4*10/100M RJ45 Port, PoE support 802.3af & at

■ Accessories

PART NO	DESCRIPTION
LA-IS4N-F0104-M	device, terminals, specification, certificate adapter(optional)